

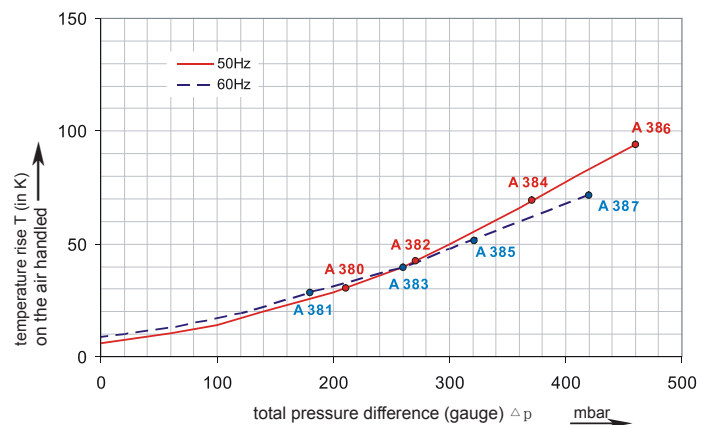
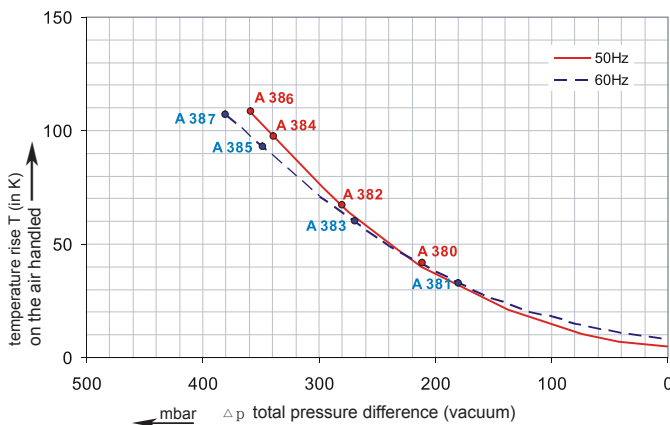
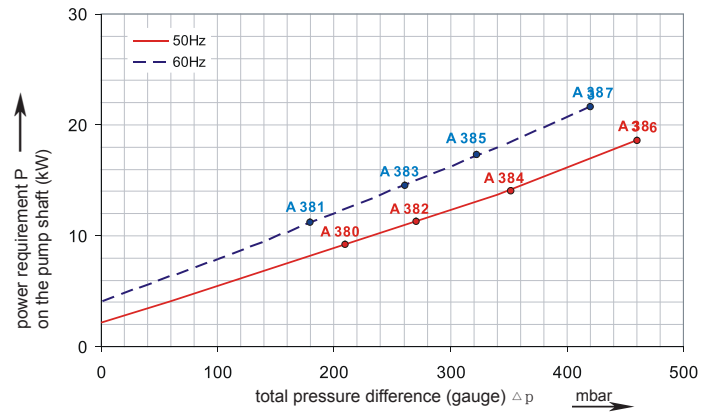
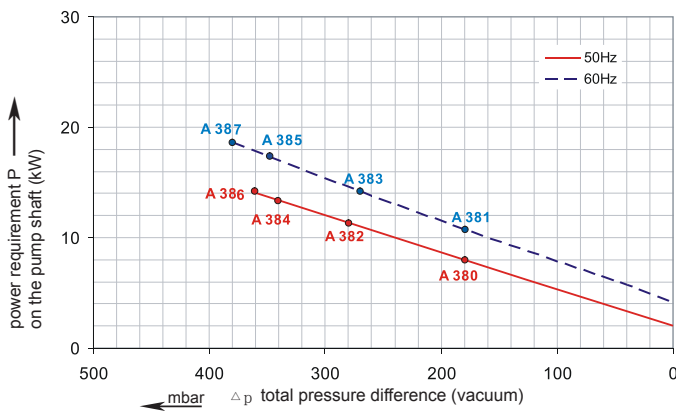


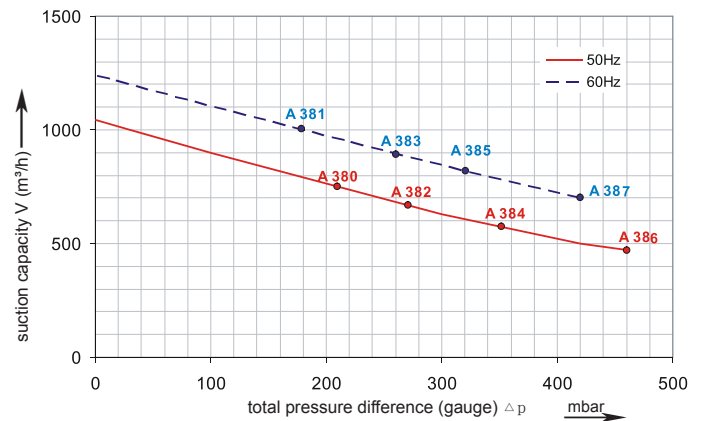

### G-2RB

Performance curve for Vacuum pump

Performance curve for Compressor

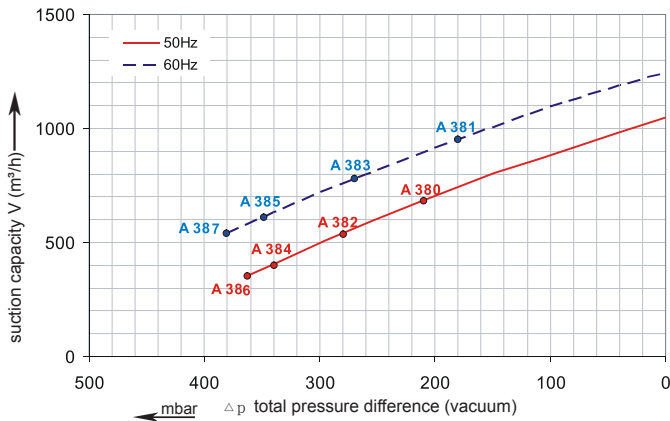

The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of +/- 10 %. The total pressure differences are valid for suction and ambient temperatures up to 25 °C. For other conditions please confer with us.

Each G-2RB type can be applied both as vacuum pump and compressor in continuous operation over the total stated performance curve range. The motors are available as standard for the input voltage range of 50 and 60 Hz and for protection category IP 55 as well as approved for UL and CSA.

## Selection and ordering data

### Type 2RB 910

Curve No.	Order No.	Fre-quency Hz	Rated power kW	Input voltage		Input current		Permissible total differential pressure <sup>2)</sup>		Sound pressure level <sup>3)</sup> dB(A)	Weight ca. kg
				V		A		Vacuum mbar	Compressor mbar		

#### 3~ 50/60 Hz IP55 isulation material class F 1)

A 380	2RB 910-7AH07	50	8.5	345D ... 415D	600Y...720Y	18.2D	10.5Y	-210	210	74	93
A 381	2RB 910-7AH07	60	9.8	380D ... 480D	660Y...720Y	18.2D	10.5Y	-180	180	79	93
A 382	2RB 910-7AH17	50	12.5	345D ... 415D	600Y...720Y	28.0D	16.2Y	-280	270	74	116
A 383	2RB 910-7AH17	60	14.5	380D ... 480D	660Y...720Y	29.0D	16.7Y	-270	260	79	116
A 384	2RB 910-7AH27	50	15.0	345D ... 415D	600Y...720Y	32.5D	18.8Y	-340	350	74	120
A 385	2RB 910-7AH27	60	17.3	380D ... 480D	660Y...720Y	34.5D	19.9Y	-350	320	79	120
A 386	2RB 910-7AH37	50	18.5	345D ... 415D	600Y...720Y	37.0D	21.0Y	-360	460	74	126
A 387	2RB 910-7AH37	60	21.3	380D ... 480D	660Y...720Y	39.0D	22.5Y	-380	420	79	126



#### Other voltage ranges

2RB910-7A <input type="checkbox"/> <input type="checkbox"/>		
50Hz	60Hz	↑ ↑
3~		
185...225 V D/320...390 V Y	200...240 V D/345...415 V Y	H 1
200...240 V D/345...415 V Y	200...275 V D/380...480 V Y	H 6
345...415 V D	380...480 V D	H 7
500 V D	575VD	C 5

Machines according to the ATEX norm 94/4 EG are available for the whole performance range.

Following types available: Category 3 G, 3/2 G, 3 D and 3/2 D.

Further voltage range on request; please quote in plain text.

All G-2RB achieve the standards and norms of the low voltage directive (LVD)2006/95/EC, rotating electrotechnical motor EN 60034-1-2004, electromagnetic compatibility(EMC)EN55014-1/2,EN61000-2/-3/-4/-6.

- 1) For standard UL for ELECTRIC MOTOR UL 1004-1.
- 2) Relief-valve are available for limiting differential pressure.
- 3) Measuring-surface sound-pressure level acc. to DIN EN 21680, measured at a distance of 1 m. The pump is throttled to an average suction pressure, a hose is connected to the discharge side (compressor) / suction side (vacuum pump), but is not fitted with relief valves.

The motors are designed according to the DIN EN 60 034 / DIN IEC 34-1 and temperature class F.

For the three phase machines the tolerances are +/- 10 % for fixed voltage and +/- 5 % for voltage range.

The single phase machines are designed with a +/- 5 % tolerances. If only 90 % of the maxium allowed pressure will be used for the continuousoperating then the allowed voltage range add to +/- 10 %.

For all single and three phase machines which designed according to the UL and CSA norm (UL 1004-1) the maximum allowed voltage tolerances are - 10 % resp. + 6 %.

The frequency tolerance is maximum +/- 2 %.

Changes in particular of the quoted performance curve, data and weights may occur without prior notice. The data given do not constitute an obligation from our side to deliver as shown.

# GREENCO®

Your Ultimate Source for Vacuum and Pressure

**ZHEJIANG GREENCO INDUSTRY CO LTD**  
 Rongshi Road Danya Industrial Zone Zeguo  
 Town Wenling 317523 China  
 Tel.: +86-576-86428999  
 Fax: +86-576-86409555  
 www.greenco.cn  
 E-mail:greenco@greenco.cn